

## UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE  
United States Patent and Trademark Office  
Address: COMMISSIONER FOR PATENTS  
P.O. Box 1450  
Alexandria, Virginia 22313-1450  
www.uspto.gov

**CORRECTED  
NOTICE OF ALLOWANCE AND FEE(S) DUE**

PHILIPS ELECTRONICS NORTH AMERICA CORPORATION  
CORPORATE INTELLECTUAL PROPERTY  
1000 WEST MAUDE AVE  
SUNNYVALE, CA 94085

05/16/2006

EXAMINER

LE, VU

ART UNIT

PAPER NUMBER

2621

DATE MAILED: 05/16/2006

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
10/044,876	10/26/2001	Chien-Hsin Lin	US018143	9838

TITLE OF INVENTION: VIDEO ARTIFACT IDENTIFICATION AND COUNTING

APPLN. TYPE	SMALL ENTITY	ISSUE FEE	PUBLICATION FEE	TOTAL FEE(S) DUE	DATE DUE
nonprovisional	NO	\$1400	\$300	\$1700	08/16/2006

THE APPLICATION IDENTIFIED ABOVE HAS BEEN EXAMINED AND IS ALLOWED FOR ISSUANCE AS A PATENT. **PROSECUTION ON THE MERITS IS CLOSED.** THIS NOTICE OF ALLOWANCE IS NOT A GRANT OF PATENT RIGHTS. THIS APPLICATION IS SUBJECT TO WITHDRAWAL FROM ISSUE AT THE INITIATIVE OF THE OFFICE OR UPON PETITION BY THE APPLICANT. SEE 37 CFR 1.313 AND MPEP 1308.

THE ISSUE FEE AND PUBLICATION FEE (IF REQUIRED) MUST BE PAID WITHIN **THREE MONTHS** FROM THE MAILING DATE OF THIS NOTICE OR THIS APPLICATION SHALL BE REGARDED AS ABANDONED. **THIS STATUTORY PERIOD CANNOT BE EXTENDED.** SEE 35 U.S.C. 151. THE ISSUE FEE DUE INDICATED ABOVE REFLECTS A CREDIT FOR ANY PREVIOUSLY PAID ISSUE FEE APPLIED IN THIS APPLICATION. THE PTOL-85B (OR AN EQUIVALENT) MUST BE RETURNED WITHIN THIS PERIOD EVEN IF NO FEE IS DUE OR THE APPLICATION WILL BE REGARDED AS ABANDONED.

**HOW TO REPLY TO THIS NOTICE:****I. Review the SMALL ENTITY status shown above.**

If the SMALL ENTITY is shown as YES, verify your current SMALL ENTITY status:

- A. If the status is the same, pay the TOTAL FEE(S) DUE shown above.
- B. If the status above is to be removed, check box 5b on Part B - Fee(s) Transmittal and pay the PUBLICATION FEE (if required) and twice the amount of the ISSUE FEE shown above, or

If the SMALL ENTITY is shown as NO:

- A. Pay TOTAL FEE(S) DUE shown above, or
- B. If applicant claimed SMALL ENTITY status before, or is now claiming SMALL ENTITY status, check box 5a on Part B - Fee(s) Transmittal and pay the PUBLICATION FEE (if required) and 1/2 the ISSUE FEE shown above.

II. PART B - FEE(S) TRANSMITTAL should be completed and returned to the United States Patent and Trademark Office (USPTO) with your ISSUE FEE and PUBLICATION FEE (if required). Even if the fee(s) have already been paid, Part B - Fee(s) Transmittal should be completed and returned. If you are charging the fee(s) to your deposit account, section "4b" of Part B - Fee(s) Transmittal should be completed and an extra copy of the form should be submitted.

III. All communications regarding this application must give the application number. Please direct all communications prior to issuance to Mail Stop ISSUE FEE unless advised to the contrary.

**IMPORTANT REMINDER:** Utility patents issuing on applications filed on or after Dec. 12, 1980 may require payment of maintenance fees. It is patentee's responsibility to ensure timely payment of maintenance fees when due.

# **PART B - FEE(S) TRANSMITTAL**

**Complete and send this form, together with applicable fee(s), to:** **Mail** **Mail Stop ISSUE FEE**  
**Commissioner for Patents**  
**P.O. Box 1450**  
**Alexandria, Virginia 22313-1450**  
**or Fax (571)-273-2885**

**INSTRUCTIONS:** This form should be used for transmitting the ISSUE FEE and PUBLICATION FEE (if required). Blocks 1 through 5 should be completed where appropriate. All further correspondence including the Patent, advance orders and notification of maintenance fees will be mailed to the current correspondence address as indicated unless corrected below or directed otherwise in Block 1, by (a) specifying a new correspondence address; and/or (b) indicating a separate "FEE ADDRESS" for maintenance fee notifications.

CURRENT CORRESPONDENCE ADDRESS (Note: Use Block 1 for any change of address)

Note: A certificate of mailing can only be used for domestic mailings of the Fee(s) Transmittal. This certificate cannot be used for any other accompanying papers. Each additional paper, such as an assignment or formal drawing, must have its own certificate of mailing or transmission.

7590 05/16/2006

**PHILIPS ELECTRONICS NORTH AMERICA CORPORATION**  
**CORPORATE INTELLECTUAL PROPERTY**  
**1000 WEST MAUDE AVE**  
**SUNNYVALE, CA 94085**

## **Certificate of Mailing or Transmission**

I hereby certify that this Fee(s) Transmittal is being deposited with the United States Postal Service with sufficient postage for first class mail in an envelope addressed to the Mail Stop ISSUE FEE address above, or being facsimile transmitted to the USPTO (571) 273-2885, on the date indicated below.

(Depositor's name)
(Signature)
(Date)

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
10/044,876	10/26/2001	Chien-Hsin Lin	US018143	9838

**TITLE OF INVENTION: VIDEO ARTIFACT IDENTIFICATION AND COUNTING**

APPLN. TYPE	SMALL ENTITY	ISSUE FEE	PUBLICATION FEE	TOTAL FEE(S) DUE	DATE DUE
nonprovisional	NO	\$1400	\$300	\$1700	08/16/2006

EXAMINER	ART UNIT	CLASS-SUBCLASS
LE, VU	2621	375-240290

1. Change of correspondence address or indication of "Fee Address" (37 CFR 1.363).  
☐ Change of correspondence address (or Change of Correspondence Address form PTO/SB/122) attached.  
☐ "Fee Address" indication (or "Fee Address" Indication form PTO/SB/47; Rev 03-02 or more recent) attached. Use of a Customer Number is required.

2. For printing on the patent front page, list  
 (1) the names of up to 3 registered patent attorneys or agents OR, alternatively, 1 \_\_\_\_\_  
 (2) the name of a single firm (having as a member a registered attorney or agent) and the names of up to 2 registered patent attorneys or agents. If no name is listed, no name will be printed. 2 \_\_\_\_\_  
 3 \_\_\_\_\_

## **3. ASSIGNEE NAME AND RESIDENCE DATA TO BE PRINTED ON THE PATENT (print or type)**

PLEASE NOTE: Unless an assignee is identified below, no assignee data will appear on the patent. If an assignee is identified below, the document has been filed for recordation as set forth in 37 CFR 3.11. Completion of this form is NOT a substitute for filing an assignment.

(A) NAME OF ASSIGNEE

(B) RESIDENCE: (CITY and STATE OR COUNTRY)

Please check the appropriate assignee category or categories (will not be printed on the patent): ☐ Individual ☐ Corporation or other private group entity ☐ Government

## **4a. The following fee(s) are enclosed:**

- ☐ Issue Fee  
☐ Publication Fee (No small entity discount permitted)  
☐ Advance Order - # of Copies \_\_\_\_\_

## **4b. Payment of Fee(s):**

- ☐ A check in the amount of the fee(s) is enclosed.  
☐ Payment by credit card. Form PTO-2038 is attached.  
☐ The Director is hereby authorized by charge the required fee(s), or credit any overpayment, to Deposit Account Number \_\_\_\_\_ (enclose an extra copy of this form).

## **5. Change in Entity Status (from status indicated above)**

- ☐ a. Applicant claims SMALL ENTITY status. See 37 CFR 1.27. ☐ b. Applicant is no longer claiming SMALL ENTITY status. See 37 CFR 1.27(g)(2).

The Director of the USPTO is requested to apply the Issue Fee and Publication Fee (if any) or to re-apply any previously paid issue fee to the application identified above. NOTE: The Issue Fee and Publication Fee (if required) will not be accepted from anyone other than the applicant; a registered attorney or agent; or the assignee or other party in interest as shown by the records of the United States Patent and Trademark Office.

Authorized Signature \_\_\_\_\_

Date \_\_\_\_\_

Typed or printed name \_\_\_\_\_

Registration No. \_\_\_\_\_

This collection of information is required by 37 CFR 1.311. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, Virginia 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, Virginia 22313-1450.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.



# UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE  
United States Patent and Trademark Office  
Address: COMMISSIONER FOR PATENTS  
P.O. Box 1450  
Alexandria, Virginia 22313-1450  
[www.uspto.gov](http://www.uspto.gov)

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
10/044,876	10/26/2001	Chien-Hsin Lin	US018143	9838
7590	05/16/2006		EXAMINER	
PHILIPS ELECTRONICS NORTH AMERICA CORPORATION CORPORATE INTELLECTUAL PROPERTY 1000 WEST MAUDE AVE SUNNYVALE, CA 94085			LE, VU	
			ART UNIT	PAPER NUMBER
			2621	
DATE MAILED: 05/16/2006				

## Determination of Patent Term Adjustment under 35 U.S.C. 154 (b) (application filed on or after May 29, 2000)

The Patent Term Adjustment to date is 762 day(s). If the issue fee is paid on the date that is three months after the mailing date of this notice and the patent issues on the Tuesday before the date that is 28 weeks (six and a half months) after the mailing date of this notice, the Patent Term Adjustment will be 762 day(s).

If a Continued Prosecution Application (CPA) was filed in the above-identified application, the filing date that determines Patent Term Adjustment is the filing date of the most recent CPA.

Applicant will be able to obtain more detailed information by accessing the Patent Application Information Retrieval (PAIR) WEB site (<http://pair.uspto.gov>).

Any questions regarding the Patent Term Extension or Adjustment determination should be directed to the Office of Patent Legal Administration at (571)-272-7702. Questions relating to issue and publication fee payments should be directed to the Customer Service Center of the Office of Patent Publication at 1-(888)-786-0101 or (571)-272-4200.

# Notice of Allowability

Application No.

10/044,876

Examiner

Vu Le

Applicant(s)

LIN ET AL.

Art Unit

2613

**-- The MAILING DATE of this communication appears on the cover sheet with the correspondence address--**

All claims being allowable, PROSECUTION ON THE MERITS IS (OR REMAINS) CLOSED in this application. If not included herewith (or previously mailed), a Notice of Allowance (PTOL-85) or other appropriate communication will be mailed in due course. **THIS NOTICE OF ALLOWABILITY IS NOT A GRANT OF PATENT RIGHTS.** This application is subject to withdrawal from issue at the initiative of the Office or upon petition by the applicant. See 37 CFR 1.313 and MPEP 1308.

1. ☒ This communication is responsive to Preliminary Amendment filed 2/20/02.
2. ☒ The allowed claim(s) is/are 1-14.
3. ☒ The drawings filed on 20 May 2002 are accepted by the Examiner.
4. ☐ Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).
  - a) ☐ All b) ☐ Some\* c) ☐ None of the:
    1. ☐ Certified copies of the priority documents have been received.
    2. ☐ Certified copies of the priority documents have been received in Application No. \_\_\_\_\_.
    3. ☐ Copies of the certified copies of the priority documents have been received in this national stage application from the International Bureau (PCT Rule 17.2(a)).

\* Certified copies not received: \_\_\_\_\_.

Applicant has THREE MONTHS FROM THE "MAILING DATE" of this communication to file a reply complying with the requirements noted below. Failure to timely comply will result in ABANDONMENT of this application.  
**THIS THREE-MONTH PERIOD IS NOT EXTENDABLE.**

5. ☐ A SUBSTITUTE OATH OR DECLARATION must be submitted. Note the attached EXAMINER'S AMENDMENT or NOTICE OF INFORMAL PATENT APPLICATION (PTO-152) which gives reason(s) why the oath or declaration is deficient.
  6. ☐ CORRECTED DRAWINGS (as "replacement sheets") must be submitted.
    - (a) ☐ including changes required by the Notice of Draftsperson's Patent Drawing Review (PTO-948) attached
      - 1) ☐ hereto or 2) ☐ to Paper No./Mail Date \_\_\_\_\_.
    - (b) ☐ including changes required by the attached Examiner's Amendment / Comment or in the Office action of Paper No./Mail Date \_\_\_\_\_.
- Identifying indicia such as the application number (see 37 CFR 1.84(c)) should be written on the drawings in the front (not the back) of each sheet. Replacement sheet(s) should be labeled as such in the header according to 37 CFR 1.121(d).
7. ☐ DEPOSIT OF and/or INFORMATION about the deposit of BIOLOGICAL MATERIAL must be submitted. Note the attached Examiner's comment regarding REQUIREMENT FOR THE DEPOSIT OF BIOLOGICAL MATERIAL.

## Attachment(s)

1. ☒ Notice of References Cited (PTO-892)
2. ☐ Notice of Draftsperson's Patent Drawing Review (PTO-948)
3. ☒ Information Disclosure Statements (PTO-1449 or PTO/SB/08), Paper No./Mail Date 10/03
4. ☐ Examiner's Comment Regarding Requirement for Deposit of Biological Material
5. ☐ Notice of Informal Patent Application (PTO-152)
6. ☐ Interview Summary (PTO-413), Paper No./Mail Date \_\_\_\_\_
7. ☐ Examiner's Amendment/Comment
8. ☒ Examiner's Statement of Reasons for Allowance
9. ☐ Other \_\_\_\_\_

***Allowable Subject Matter***

1. Claims 1-14 are allowed.
2. The following is an examiner's statement of reasons for allowance:

The prior art (WO 01/20912) closest to the present invention belongs to the same assignee. The prior art and the present invention utilize similar algorithm for identifying block artifacts in the digital video pictures. However, Examiner fails to ascertain from the prior art disclosure or suggestion the limitations of "...using first and second loops for each of horizontal and vertical count table entries, the first loop being adapted to increase the count table entries up to the length of a remainder value of a detected artifact value and the second loop being adapted to increase the count table entries using a quotient value of a detected artifact value" as recited in claim 1.

Any comments considered necessary by applicant must be submitted no later than the payment of the issue fee and, to avoid processing delays, should preferably accompany the issue fee. Such submissions should be clearly labeled "Comments on Statement of Reasons for Allowance."

**Contact**

3. Any inquiry concerning this communication or earlier communications from the examiner should be directed to Vu Le whose telephone number is 703-308-6613. The examiner can normally be reached on M-F 8:30-6:00.

If attempts to reach the examiner by telephone are unsuccessful, the examiner's supervisor, Chris Kelley can be reached on 703-305-4856. The fax phone number for the organization where this application or proceeding is assigned is 703-872-9306.

Art Unit: 2613

Information regarding the status of an application may be obtained from the Patent Application Information Retrieval (PAIR) system. Status information for published applications may be obtained from either Private PAIR or Public PAIR. Status information for unpublished applications is available through Private PAIR only. For more information about the PAIR system, see <http://pair-direct.uspto.gov>. Should you have questions on access to the Private PAIR system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free).



Vu Le  
Primary Examiner  
AU 2613  
(703) 308-6613  
[Vu.Le@uspto.gov](mailto:Vu.Le@uspto.gov)



RECEIVED

OCT 27 2003

<b>INFORMATION DISCLOSURE STATEMENT BY APPLICANT</b>	Application Number	10/044876
	Filing Date	10/26/2001
	First Named Inventor	LIN, CHIEN-HSIN
	Art Unit	2634 2613
	Examiner Name	
	Attorney Docket Number	US01 8143

Technology Center 2600

U.S. PATENT DOCUMENTS					
Examiner Initials*	Cite No. <sup>1</sup>	Document Number No.-Kind Code <sup>2</sup> (if known)	Publication Date MM-DD-YYYY	Name of Patentee or Applicant of Cited Document	Pages, Columns Lines, Where Relevant Passages or Relevant Figures Appear
		US-			
		US-			
		US-			
		US-			
		US-			
		US-			

FOREIGN PATENT DOCUMENTS						
Examiner Initials*	Cite No. <sup>1</sup>	Document Number (city <sup>2</sup> -no.-kind <sup>3</sup> , if known)	Publication Date MM-DD-YYYY	Name of Patentee or Applicant of cited document	Pages, Columns Lines, Where Relevant Passages or Relevant Figures Appear	T <sup>4</sup>
VL		WO 01 20912	03-22-2001	DROUOT, Antoine		

NON-PATENT LITERATURE DOCUMENTS			
Examiner Initials*	Cite No. <sup>1</sup>	Include name of the author (in capital letters), title of the article (when appropriate), title of the item (book, magazine, journal, serial, symposium, catalog, etc.), date, page(s), volume-issue number(s), publisher, city and/or country where published.	T <sup>4</sup>

Examiner Signature	 PRIMARY EXAMINER	Date Considered	1/11/05
-----------------------	---	--------------------	---------

\* EXAMINER: Initial if reference considered, whether or not citation is in conformance with MPEP 609. Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

<sup>1</sup> Unique citation designation number. <sup>2</sup> See attached Kinds of U.S. Patent Documents. <sup>3</sup> Enter Office that issued the document, by the two-letter code (WIPO Standard ST.3). <sup>4</sup> For Japanese patent documents, the indication of the year of the reign of the Emperor must precede the serial number of the patent document. <sup>5</sup> Kind of document by the appropriate symbols as indicated on the document under WIPO Standard ST. 16 if possible. <sup>6</sup> Applicant is to place a check mark here if English language Translation is attached.

<b>Notice of References Cited</b>	Application/Control No. 10/044,876	Applicant(s)/Patent Under Reexamination LIN ET AL.	
	Examiner Vu Le	Art Unit 2613	Page 1 of 1

**U.S. PATENT DOCUMENTS**

*		Document Number Country Code-Number-Kind Code	Date MM-YYYY	Name	Classification
	A	US-6,266,102 B1	07-2001	Azuma et al.	348/671
	B	US-5,724,453	03-1998	Ratnakar et al.	382/251
	C	US-4,885,636	12-1989	Sullivan, James R.	375/240.14
	D	US-2001/0026283	10-2001	Yoshida et al.	345/600
	E	US-			
	F	US-			
	G	US-			
	H	US-			
	I	US-			
	J	US-			
	K	US-			
	L	US-			
	M	US-			

**FOREIGN PATENT DOCUMENTS**

*		Document Number Country Code-Number-Kind Code	Date MM-YYYY	Country	Name	Classification
	N	EP0881837A1	02-1998	EP	Mancuso et al	H04N 7/30
	O					
	P					
	Q					
	R					
	S					
	T					

**NON-PATENT DOCUMENTS**

*		Include as applicable: Author, Title Date, Publisher, Edition or Volume, Pertinent Pages)
	U	Wu et al, "A Generalized Block-Edge Impairment Metric for Video Coding", IEEE Signal Processing Letters, vol. 4, no. 11, pp. 317-320, November 1997.
	V	
	W	
	X	

\*A copy of this reference is not being furnished with this Office action. (See MPEP § 707.05(a).)  
Dates in MM-YYYY format are publication dates. Classifications may be US or foreign.





(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 881 837 A1

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
02.12.1998 Bulletin 1998/49

(51) Int. Cl.<sup>5</sup>: H04N 7/30

(21) Application number: 97830264.4

(22) Date of filing: 30.05.1997

(84) Designated Contracting States:  
AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC  
NL PT SE

(71) Applicant:  
STMicroelectronics S.r.l.  
20041 Agrate Brianza (Milano) (IT)

(72) Inventors:  
• Mancuso, Massimo  
20052 Monza (Milano) (IT)  
• Poluzzi, Rinaldo  
20125 Milano (IT)


(74) Representative: Mittler, Enrico  
c/o Mittler & C. s.r.l.,  
Viale Lombardia, 20  
20131 Milano (IT)

(54) Post-processing method for reducing artifacts in block-coded digital images, and post-processing device for actuating such method

(57) A post-processing method for reducing artifacts in block-coded digital images, characterized by providing for: dividing an input image (In) into a plurality of image blocks (IB); for each image block (IB), estimating global features (GF) of said image block providing information on an average content of image edges along the horizontal and vertical directions of said image block (IB); for each pixel (Px) of an image block (IB) under examination, estimating local features (LF)

for said pixel (Px) providing information on the content of image edges along the horizontal and vertical directions of an image area near said pixel (Px); modifying the value of said pixel (Px) according to both said global features (GF) of the image block (IB) to which said pixel (Px) belongs and said local features (LF) of the image area near said pixel (Px).

Fig.1

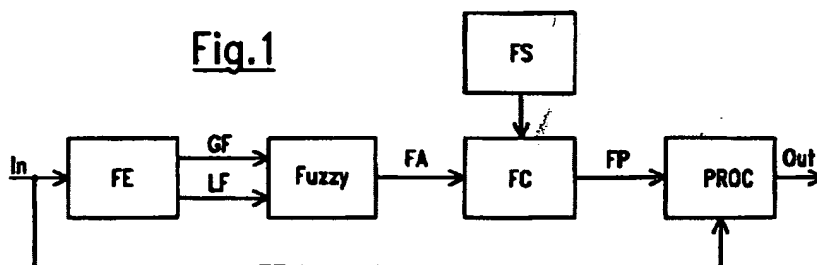

## Description

The present invention relates digital image coding. More precisely, the invention relates to a post-processing method for reducing artifacts in block-coded digital images, and to a post-processing device suitable for actuating such a method.

With the diffusion of digital communication systems, digital images are more and more used. This has led to the diffusion of still and video cameras with digital acquisition and processing capability.

In order to better exploit storage means and transmission bandwidth, digital image compression standards have been developed, such as JPEG for still images, and MPEG-1 and MPEG-2 for digital television image sequences.

The above-referred compression standards provides for block-coding based on Discrete Cosine Transform (DCT). A digital image is divided into blocks of pixels, and each block is encoded independently from the others. DCT coefficients for the pixels of each block are evaluated and a quantization matrix is applied to the DCT coefficients to reduce the information to be stored or transmitted. When the image is to be displayed, it must be decoded in advance.

Due to the quantization process, these image compression methods are lossy, i.e. they cause a loss of information in the decoded image with respect to the original image. The decoded image can thus present noticeable degradation, mainly consisting of two kinds of artifacts known in the art under the names of "grid noise" and "staircase noise".

In order to reduce the image degradation, post-processing methods of the decoded image have been proposed which allow for attenuating grid noise and staircase noise.

In view of the state of the art described, it is an object of the present invention to provide a new post-processing method for reducing artifacts in block-coded digital images.

According to the present invention, such object is attained by means of a post-processing method for reducing artifacts in block-coded digital images, characterized by providing for:

- a) dividing an input image into a plurality of image blocks;
- b) for each image block, estimating global features of said image block providing information on an average content of image edges along the horizontal and vertical directions of said image block;
- c) for each pixel of an image block under examination, estimating local features for said pixel providing information on the content of image edges along the horizontal and vertical directions of an image area around said pixel;
- d) modifying the value of said pixel according to both said global features of the image block to which said pixel belongs and said local features of the image area around said pixel.

Also according to the invention, there is also provided a post-processing device for actuating said method, characterized by comprising:

- first means supplied with an input image for estimating global features of an image block under examination, said global features providing information on an average content of image edges along the horizontal and vertical directions of said image block;
- second means supplied with said input image for estimating local features for each pixel of the image block under examination, said local features providing information on the content of image edges along the horizontal and vertical directions of an image area around said pixel;
- third means supplied with said global features and said local features for modifying the value of said pixel according to both said global features and said local features.

The features and advantages of the present invention will be made apparent from the following detailed description of an embodiment thereof, illustrated as a non-limiting example in the annexed drawings, wherein:

Figure 1 is a schematic block diagram illustrating the principle of operation of a method according to the present invention;

Figure 2 shows a digital image divided into image blocks;

Figure 3 shows in detail an image block into which the digital image of Figure 2 is divided;

Figure 4 shows an array of pixels of the image block of Figure 3;

Figure 5 shows an image sub-block of the image block of Figure 3 used for evaluating global features of the image block;

Figure 6 shows an horizontal processing window used for evaluating local features in the horizontal direction for a generic pixel of the image block;

Figure 7 shows a vertical processing window used for evaluating local features in the vertical direction for said generic pixel;

Figures 8 and 9 shows two membership functions used to perform a fuzzy computation;

Figure 10 is a block diagram of a device according to the present invention;  
Figure 11 shows the structure of two blocks of the device of Figure 10; and  
Figure 12 is a block diagram of other two blocks of the device of Figure 10.

5 With reference to Figure 1, there is shown a block diagram illustrating the principle of operation of the post-processing method according to the present invention. An input decoded compressed digital image In is supplied to a Feature Extraction block FE. Block FE provides for analyzing the image to evaluate global and local features thereof. The global and local features, respectively GF and LF, of the image In evaluated by block FE are supplied as inputs to a Fuzzy Process block FUZZY which, according to fuzzy rules, determines parameters FA suitable for determining the kind of  
10 filtering to be performed, in accordance to the global and local features GF and FL of the image. The parameters FA calculated by block FUZZY are supplied to a Filter Composition block FC which according to said parameters FA determines the type of filtering to be performed out of a set of predefined filters (block FS). Filter parameters FP determined by block FC are then supplied to a Processing block PROC, also supplied directly with the input image In, which performs the filtering of the input image In according to the filter parameters FP to provide a post-processed output image Out.

15 It appears that the kind of filtering to be performed on the decoded input image In is chosen after an estimation of the global and local features of the decoded input image. For image areas near grid noise and near an edge, a low-pass filtering is performed, to reduce both staircase noise and grid noise. For areas containing fine details (image edges and texture), no filtering is performed. Thus, the method according to the present invention provides for performing a non-linear adaptive filtering on the pixels of the decoded image.

20 The principle of operation outlined above will be now described in detail.

As shown in Figure 2, the input image In is partitioned into image blocks IB, each containing an equal number of pixels. A typical dimension of the blocks is 8\*8 pixels (Figure 3), but this is not however to be intended as a limitation, since other block dimensions are suitable.

25 The image blocks IB of the input image In are scanned line by line starting from the top-left block to the bottom-right one. For each image block IB, the Feature Extraction block FE in Figure 1 determines the global and local features GF and LF.

Global features of the image block IB under examination are determined by applying horizontal and vertical Sobel operators:

30 horizontal Sobel operator (Hsob): 
$$\begin{bmatrix} h11 & h12 & h13 \\ h21 & h22 & h33 \\ h31 & h32 & h33 \end{bmatrix};$$

35 vertical Sobel operator (Vsob): 
$$\begin{bmatrix} v11 & v12 & v13 \\ v21 & v22 & v23 \\ v31 & v32 & v33 \end{bmatrix}$$

40 to each pixel belonging to an image sub-block internal to the image block IB. For example, the following Sobel operators:

45 Hsob: 
$$\begin{bmatrix} -1 & 0 & 1 \\ -2 & 0 & 2 \\ -1 & 0 & 1 \end{bmatrix};$$

50 Vsob: 
$$\begin{bmatrix} -1 & -2 & -1 \\ 0 & 0 & 0 \\ 1 & 2 & 1 \end{bmatrix}$$

are applied to a 6\*6 pixel image sub-block ISB (gray area in Figure 5). As shown in Figure 4, for each pixel Pi of the image sub-block ISB a 3\*3 array of neighboring pixels M centered in pixel Pi is considered, and the values of the pixels  
55 of said array M are multiplied by the coefficients of the horizontal and vertical Sobel operators, to obtain:

$$Hsob = (P3+P8+2*P5) - (P1+P6+2*P4),$$

$$Vsob = (P6+P8+2*P7) - (P1+P3+2*P2),$$

where P1-P4 and P5-P8 are the values of the pixels (gray levels).

As known, horizontal and vertical Sobel operators perform a filtering capable of detecting edges along the horizontal and vertical direction, respectively.

The output values of the horizontal Sobel operators calculated for the pixels of image sub-block ISB are accumulated to obtain an accumulated value  $Acc(Hsob)$ , and the output values of the vertical Sobel operators calculated for the pixels of image sub-block ISB are accumulated to obtain an accumulated value  $Acc(Vsob)$ .  $Acc(Hsob)$  gives the high-frequency content in the horizontal direction (vertical edges) of the image block IB.  $Acc(Vsob)$  gives the high-frequency content in the vertical direction (horizontal edges) of image block IB. Thus,  $Acc(Hsob)$  and  $Acc(Vsob)$  respectively provide the degree of "edgeness" of the image block under examination in the vertical and horizontal directions. It is to be noted that in order to evaluate the global features GF of the image block IB under examination, only the pixels belonging to this block are considered (by applying 3\*3 Sobel operators to the 6\*6 image sub-block ISB, it is not necessary to take into consideration pixels belonging to neighboring image blocks).

Global features GF of the image block under examination can be formed by the accumulated values  $Acc(Hsob)$  and  $Acc(Vsob)$ . Alternatively, the global features GF of the image block can be formed by an average of the accumulated values  $Acc(Hsob)$  and  $Acc(Vsob)$ , to obtain the average number of edges in the horizontal and vertical directions in the image block under examination.

Local features LF of the image block IB are estimated according to the following method. All the pixels of the image block IB under examination are scanned line by line starting from the top-left pixel down to the bottom-right one. To each pixel a horizontal processing window is applied: a prescribed number of pixels respectively preceding and following the pixel under consideration and belonging to the same image line of the pixel under consideration is considered. A suitable horizontal processing window HPW is shown in Figure 6, which is a horizontal 1\*5 processing window: for a given pixel, the two preceding pixels Pa, Pb and the two following pixels Pc, Pd belonging to the same line are considered. In Figure 6 there is shown by way of example the horizontal processing window HPW associated to the first pixel Px of the image block. It should be noted that not only the pixels of the image block IB under examination are considered, but also pixels belonging to neighboring image blocks; this is for example the case of the first, second, seventh and eighth pixel of each line of pixels of the image block IB under examination.

The horizontal Sobel operator Hsob previously mentioned is applied to each pixel Pa, Pb, Px, Pc, Pd in the horizontal processing window HPW, to obtain five output values HS1-HS5. Values HS1-HS5 provide the local features in the horizontal direction for the pixel under examination Px, i.e. the high-frequency content in the horizontal direction of the image region around the pixel under examination.

Similarly, a vertical processing window is applied to each pixel of the image block IB. The vertical processing window is formed by the pixel under consideration Px, and a prescribed number of pixels belonging to the same column as and preceding and following the pixel under consideration; for example, as shown in Figure 7 the vertical processing window VPW can have dimensions identical to the horizontal processing window HPW (5\*1), and thus contains two pixels Pa, Pf preceding pixel Px and two pixels Pg, Ph following pixel Px in the vertical direction.

The vertical Sobel operator Vsob previously mentioned is then applied to each pixel of the vertical processing window VPW to obtain five output values VS1-VS5. Values VS1-VS5 form the local features in the vertical direction for the pixel under examination, i.e. the high-frequency content in the vertical direction of an image region around the pixel under examination.

The global features GF for the image block IB under examination (i.e., the two accumulated values  $Acc(Hsob)$  and  $Acc(Vsob)$  or, in alternative, the average value of  $Acc(Hsob)$  and  $Acc(Vsob)$ ) and the local features LF for the pixel under examination inside said image block (the ten values HS1-HS5 and VS1-VS5) are then supplied to the Fuzzy Process block FUZZY. This block provides for evaluating the degree of membership of a generic value HSi and Vsi (i=1..5) to two fuzzy sets "Small" and "Big"; these degree of membership can be evaluated by applying to HSi, VSi the membership functions depicted in Figures 8 and 9. In these figures, Th1 and Th2 are values depending on the global features GF of the image block under examination, i.e. on the accumulated values  $Acc(Hsob)$  and  $Acc(Vsob)$  or on the average of the accumulated values; in the first case, Th1 and Th2 are different for the Hsi and Vsi values; in the second case, Th1 and Th2 are the same for Hsi and Vsi values.

Fuzzy rules having as antecedents the degrees of membership of the output values HSi and VSi to the two fuzzy sets "Small" and "Big" are then evaluated. This means that 32 rules are to be evaluated for both the horizontal and vertical directions. However, all those fuzzy rules having the same consequence are synthesized in one rule only by an else operator. In this way, the system complexity is reduced, and a total of nine rules for each direction have to be evaluated.

The following fuzzy rules are applied to the five values HS1-HS5 associated to the horizontal direction:

1. If HS1 is Small and HS2 is Small and HS3 is Small and HS4 is Small and HS5 is Small, then  $\alpha_1$  is Big;
2. If HS1 is Small and HS2 is Small and HS3 is Small and HS4 is Small and HS5 is Big, then  $\alpha_2$  is Big;

3. If HS1 is Small and HS2 is Small and HS3 is Small and HS4 is Big and HS5 is Small, then  $\alpha_3$  is Big;
4. If HS1 is Small and HS2 is Small and HS3 is Small and HS4 is Big and HS5 is Big, then  $\alpha_4$  is Big;
5. If HS1 is Small and HS2 is Big and HS3 is Small and HS4 is Small and HS5 is Small, then  $\alpha_5$  is Big;
6. If HS1 is Big and HS2 is Small and HS3 is Small and HS4 is Small and HS5 is Small, then  $\alpha_6$  is Big;
7. If HS1 is Big and HS2 is Small and HS3 is Small and HS4 is Small and HS5 is Big, then  $\alpha_7$  is Big;
8. If HS1 is Big and HS2 is Big and HS3 is Small and HS4 is Small and HS5 is Small, then  $\alpha_8$  is Big.

The activation level of each rule depends on the degree of memberships of the pattern of output values HSi of the horizontal Sobel operator applied to the five pixels of the horizontal processing window HPW; the degree of memberships depend in turn on the global features GF of the image block to which the pixel under examination belongs. The activation level of the else (ninth) rule is computed as  $\alpha_{\text{else}} = (1 - \alpha_{\text{ave}})$ , where  $\alpha_{\text{ave}}$  is the average activation degree of fuzzy rules 1 to 8,  $\alpha_1$  to  $\alpha_8$  and  $\alpha_{\text{else}}$ , and a similar set of nine activation degrees for the fuzzy rules applied to values VS1-VS5 form the output FA of the fuzzy process block FUZZY in Figure 1.

Each one of the above-listed rules is associated to a respective set of predefined filter parameters, which are stored as a look-up table in block FS of Figure 1. Suitable predefined filter parameter sets are for example:

Rule 1: (c11=1.0, c12=1.0, c13=1.0, c14=1.0, c15=1.0) if the pixel under examination lies outside the image sub-block ISB, and (c11=0.0, c12=1.0, c13=1.0, c14=1.0, c15=0.0) if the pixel under examination lies inside the image sub-block ISB;

Rule 2: (c21=0.5, c22=1.0, c23=1.0, c24=1.0, c25=0.0);

Rule 3: (c31=0.5, c32=1.0, c33=1.0, c34=0.0, c35=0.0);

Rule 4: (c41=0.5, c42=1.0, c43=1.0, c44=0.0, c45=0.0);

Rule 5: (c51=0.0, c52=0.0, c53=1.0, c54=1.0, c55=0.5);

Rule 6: (c61=0.0, c62=1.0, c63=1.0, c64=1.0, c65=0.5);

Rule 7: (c71=0.0, c72=1.0, c73=1.0, c74=1.0, c75=0.0);

Rule 8: (c81=0.0, c82=0.0, c83=1.0, c84=1.0, c85=0.5);

Else rule: (c91=0.0, c92=0.0, c93=1.0, c94=0.0, c95=0.0).

The parameters FP of the filter to be applied to the five pixels of the horizontal processing window HPW are calculated as a weighted average of the nine filters described above, with weight factors formed by the activation degrees  $\alpha_1$  to  $\alpha_8$  and  $\alpha_{\text{else}}$  of the respective fuzzy rules.

Assuming that  $\alpha_i$  is the activation degree of the i-th fuzzy rule ( $i=1..9$ ), the ninth fuzzy rule being the else fuzzy rule ( $\alpha_9 = \alpha_{\text{else}}$ ), and  $c_{ij}$  are the coefficients of the i-th filter ( $i=1..9$ ,  $j=1..5$ ), the weight factor applied to the i-th filter, associated to the i-th fuzzy rule is:

$$F_i = \alpha_i \cdot c_{ij}$$

and the coefficients  $H_j$  of the final horizontal filter to be applied to the pixels of the horizontal processing window HPW are given by:

$$H_j = \frac{\sum_{i=1}^9 \alpha_i \cdot c_{ij}}{N}$$

where N is a normalization factor.

The horizontally-filtered value  $P_x$  of the pixel  $P_x$  under examination (at the center of the horizontal processing window) is then calculated as a weighted average of the values of the pixels  $P_a$ ,  $P_b$ ,  $P_x$ ,  $P_c$  and  $P_d$  belonging to the horizontal processing window HPW, with weight factors formed by the coefficients  $H_j$ :

$$P_x = H_1 \cdot P_a + H_2 \cdot P_b + H_3 \cdot P_x + H_4 \cdot P_c + H_5 \cdot P_d.$$

Similar calculations are performed for the vertical direction, starting from the output values VS1-VS5 of the vertical Sobel operators applied to the pixels  $P_a$ ,  $P_f$ ,  $P_x$ ,  $P_g$  and  $P_h$  in the vertical processing window VPW. The coefficients  $V_j$  ( $j=1..5$ ) of the filter for the vertical direction are calculated in a way completely similar to that used for determining the coefficients  $H_j$ :

$$V_j = \frac{\sum_{i=1}^9 \beta_i \cdot c_{ij}}{N}$$

where  $\beta_i$  ( $i=1..9$ ) are the activation degrees of nine fuzzy rules for the vertical direction (similar to those listed above for the horizontal direction) and  $c_{ij}$  ( $j=1..5$ ) now are the predefined filter parameters associated to the  $i$ -th fuzzy rule for the vertical direction. The coefficients  $V_j$  are then applied to the pixels in the vertical processing window VPW to calculate a weighted average of the same. The filtered value of the pixel  $P_x$  under examination, filtered in both the horizontal and vertical direction, is provided at the output Out of the processing block PROC.

The value of the pixel  $P_x$  under examination to be multiplied by the vertical filter coefficient  $V_3$  can be the value  $\underline{P_x}$  obtained after having applied to the pixels in the horizontal processing window HPW the horizontal filter  $H_j$  ( $j=1..5$ ):

$$\text{Out} = V_1 \cdot P_e + V_2 \cdot P_f + V_3 \cdot \underline{P_x} + V_4 \cdot P_g + V_5 \cdot P_h.$$

Alternatively, it is possible to evaluate first the vertically-filtered value  $\underline{P_x}$  of the pixel under examination:

$$\underline{P_x} = V_1 \cdot P_e + V_2 \cdot P_f + V_3 \cdot P_x + V_4 \cdot P_g + V_5 \cdot P_h,$$

and then performing the filtering in the horizontal direction applying to this value the respective coefficient  $H_3$  of the horizontal filter  $H_j$ :

$$\text{Out} = H_1 \cdot P_a + H_2 \cdot P_b + H_3 \cdot \underline{P_x} + H_4 \cdot P_c + H_5 \cdot P_d.$$

The sequence is of no importance, the important thing to be underlined being that at the end of the process the value of the pixel under examination is the result of both an horizontal and a vertical filtering.

Figure 10 is a block diagram of a device suitable for actuating the method previously described. The device comprises two main blocks: a first block 1 evaluates the global features GF of the image blocks IB the image to be post-processed is divided in, and a second block 2 evaluates the local features LF of the pixels of the image and performs the filtering according to both the global features and the local features.

It is assumed that the image to be post-processed is scanned line by line in a sequential order. Signal In is a stream of pixels of the input image scanned line by line. Block 1 is supplied with signal In; signal In also supplies a cascade of two line memories LM1 and LM2 whose outputs supplies block 1.

Inside block 1, signal In and the outputs of line memories LM1 and LM2 supply a block 3 of pixel delays suitable for implementing a 3\*3 pixel window which is used to calculate horizontal and vertical Sobel operators for the pixels of the 6\*6 image sub-block ISB inside each image block IB. Block 3 supplies a block 4 which calculates the outputs  $H_{sob}$  and  $V_{sob}$  of the horizontal and vertical Sobel operators for those pixels of the current image line belonging to the 6\*6 image sub-blocks ISB of each image block IB. The outputs  $H_{sob}$  and  $V_{sob}$  of block 4 are supplied to an accumulator block 5 wherein they are accumulated. After eight image lines, i.e. a line of image blocks IB, have been scanned, the accumulated values  $Acc(H_{sob})$ ,  $Acc(V_{sob})$  (or alternatively the average thereof) for each image block IB are stored in a memory block 6.

The output of line memory LM2 supplies a cascade of eight further line memories LM3-LM10. Block 2 is supplied in parallel with the outputs of line memories LM4-LM10. In this way, evaluation of the local features and calculation of the filter parameters starts after block 1 has estimated the global features GF for a line of image blocks IB.

Inside block 2, a block 7 of pixel delays is supplied with the outputs of line memories LM4-LM10; by means of the line memories LM4-LM10 and the pixel delay block 7 it is possible to implement the 5\*1 vertical processing window VPW. The outputs L4-L10 of the pixel delays block 7 supply a block 8 which applies the vertical Sobel operator to each pixel inside the vertical processing window VPW. To avoid the use of further line memories, a parallel approach is preferred providing for calculating five vertical Sobel operators in parallel; the outputs of the five vertical Sobel operators VS1-VS5 are supplied to a vertical fuzzy filter 9, which is also supplied with the outputs L6-L10 of the pixel delay block 7 and the output MOUT of the memory MEM of block 1. MOUT supplies the global features GF of the image block IB currently processed by block 2, i.e. the accumulated value  $Acc(V_{sob})$  or, alternatively, the average of  $Acc(V_{sob})$  and  $Acc(H_{sob})$ . The vertical fuzzy filter block 9 evaluates the degree of membership of values VS1-VS5 to the fuzzy sets "Small" and "Big" taking into account the global features provided by MOUT, evaluates the activation levels of the nine fuzzy rules for the vertical direction, calculates the coefficients  $V_j$  ( $j=1..5$ ) of the vertical filter and applies the vertical filter coefficients  $V_j$  to the five pixels  $P_e$ ,  $P_f$ ,  $P_x$ ,  $P_g$ ,  $P_h$  in the vertical processing window VPW, to calculate the vertically-filtered value  $\underline{P_x}$  of the pixel in the middle of the vertical processing window. The output of the vertical fuzzy filter block 9 forms the vertically-filtered value  $\underline{P_d}$  of pixel  $P_d$  in the horizontal processing window HPW shown in Figure 6 and sup-

plies directly a horizontal fuzzy filter block 10; the output  $P_d$  of block 9 also supplies a cascade of four pixel delays D whose outputs respectively form the vertically-filtered values  $P_c$ ,  $P_x$ ,  $P_b$ ,  $P_a$  of the pixels  $P_c$ ,  $P_x$ ,  $P_b$ ,  $P_a$  in the horizontal processing window HPW and supply the horizontal fuzzy filter block 10.

In parallel to blocks 8 and 9, the outputs L7-L9 of the pixel delay block 7 supply a block 11 which applies the horizontal Sobel operators to the pixels inside the horizontal processing window HPW. Differently from the vertical sobel operators, only one horizontal sobel operator is calculated at a time; a compensation delay block 12 introduces a delay for compensating the processing delay of the vertical fuzzy filter block 9. The output of block 12, forming the output of the horizontal Sobel operator HS5 applied to pixel  $P_d$  of the horizontal processing window in Figure 6, supplies the horizontal fuzzy filter block 10 and a cascade of four pixel delays D, the outputs thereof forming the values HS4, HS3, HS2 and HS1 and supplying the horizontal fuzzy filter block 10. The horizontal fuzzy filter block 10, which is also supplied by the output MOUT of the memory block MEM in block 1 providing the value  $Acc(Hsob)$  (or alternatively the average of values  $Acc(Hsob)$  and  $Acc(Vsob)$ ), evaluates the degree of membership of values HS1-HS5 to the fuzzy sets "Small" and "Big" according to the value of the global features GF provided by MOUT, evaluates the activation levels of the nine fuzzy rules described above for the filtering in the horizontal direction, calculates the coefficients  $H_j$  of the horizontal filter and applies the parameters  $H_j$  to the vertically-filtered values  $P_a$ ,  $P_b$ ,  $P_x$ ,  $P_c$ ,  $P_d$  of the pixels  $P_a$ ,  $P_b$ ,  $P_x$ ,  $P_c$ ,  $P_d$  in the horizontal processing window HPW to obtain the horizontally- and vertically-filtered value Out of the pixel  $P_x$  under examination.

A control circuit CTRL controls the operation of blocks 1, 2 and the line memories LM1-LM10.

Figure 11 shows the structure of the vertical and horizontal Sobel operator blocks 8 and 11 of Figure 10. They are composed in a straightforward way by adders.

Figure 12 shows the structure of both the vertical fuzzy filter block 9 and the horizontal fuzzy filter block 10. X1-X5 are the vertical or, respectively, horizontal Sobel operator outputs VS1-VS5 and HS1-HS5. X1-X5 are supplied to a fuzzy rule evaluation block 13 which evaluates the activation degrees  $\beta_1$ - $\beta_9$  of the nine fuzzy rules for the vertical direction or, respectively, the activation degrees  $\alpha_1$ - $\alpha_9$  of the nine fuzzy rules for the horizontal direction. The activation degrees evaluated by block 13 are supplied to a look-up table of respective predefined filter parameters F1-F9 (forming block FS in Figure 1), and the outputs of the look-up table, i.e. the predefined filter parameters  $c_j$  multiplied by the activation degree of the respective fuzzy rule, are supplied to a filter composition block 14 which calculates the coefficients V1-V5 or, respectively, H1-H5, of the vertical or, respectively, horizontal filter. Said coefficients are then supplied to a processing block 15 which is also supplied with the pixel values PXS (L6-L10 or, respectively,  $P_a$ ,  $P_b$ ,  $P_x$ ,  $P_c$ ,  $P_d$  in Figure 10); block 15 applies the filter coefficients to the pixel values to obtain the filtered value of the pixel under examination  $P_x$ .

## Claims

1. Post-processing method for reducing artifacts in block-coded digital images, characterized by providing for:

- a) dividing an input image (In) into a plurality of image blocks (IB);
- b) for each image block (IB), estimating global features (GF) of said image block providing information on an average content of image edges along the horizontal and vertical directions of said image block (IB);
- c) for each pixel ( $P_x$ ) of an image block (IB) under examination, estimating local features (LF) for said pixel ( $P_x$ ) providing information on the content of image edges along the horizontal and vertical directions of an image area near said pixel ( $P_x$ );
- d) modifying the value of said pixel ( $P_x$ ) according to both said global features (GF) of the image block (IB) to which said pixel ( $P_x$ ) belongs and said local features (LF) of the image area near said pixel ( $P_x$ ).

2. Method according to claim 1, characterized in that step d) provides for:

- d1) defining a set of predefined local features;
- d2) determining degrees of coincidence ( $\alpha_1$ - $\alpha_9$ ,  $\beta_1$ - $\beta_9$ ) of said local features (LF) of the image area around said pixel ( $P_x$ ) with each predefined local features of said set, said degrees of coincidence ( $\alpha_1$ - $\alpha_9$ ,  $\beta_1$ - $\beta_9$ ) depending on said global features (GF) of the image block (IB) to which said pixel ( $P_x$ ) belongs;
- d3) making the value of said pixel ( $P_x$ ) equal to a weighted average ( $P_x$ ,  $P_x$ ) of the value of said pixel ( $P_x$ ) and of the values of neighboring pixels ( $P_a$ - $P_d$ ,  $P_e$ - $P_f$ ), with weight factors (H1-H5, V1-V5) depending on said degrees of coincidence of said local features (LF) with each of said predefined local features.

3. Method according to claim 2, characterized in that said determining the degrees of coincidence ( $\alpha_1$ - $\alpha_9$ ,  $\beta_1$ - $\beta_9$ ) in step d2) provides for performing a fuzzy calculation.

4. Method according to claim 3, characterized in that each of said predefined local features is associated to a respective group of predefined weight factors (ci), and each of said weight factors (H1-H5,V1-V5) is calculated as a weighted average of corresponding predefined weight factors (ci) of said groups with weight coefficients ( $\alpha_1$ - $\alpha_9$ , $\beta_1$ - $\beta_9$ ) depending on said degrees of coincidence of said local features (LF) with each of said predefined local features.
5. Method according to claim 4, characterized in that said estimating global features (GF) of the image block (IB) under examination provides for applying horizontal and vertical Sobel operators (Hsob,Vsob) to pixels belonging to an image sub-block (ISB) internal to said image block (IB) under examination.
6. Method according to claim 5, characterized in that said estimating global features (GF) of the image block (IB) under examination provides for adding outputs of the horizontal Sobel operators (Hsob) applied to each pixel of said image sub-block (ISB) to obtain an accumulated output of horizontal Sobel operators (Acc(Hsob)), and adding outputs of the vertical Sobel operators (Vsob) applied to each pixel of said image sub-block (ISB) to obtain an accumulated output of vertical Sobel operators (Acc(Vsob)).
7. Method according to claim 6, characterized in that said global features (GF) of the image block (IB) under examination are formed by said accumulated outputs of the horizontal and vertical Sobel operators (Acc(Hsob),Acc(Vsob)).
8. Method according to claim 6, characterized in that said global features (GF) of the image block (IB) under examination are formed by an average of said accumulated outputs of the horizontal and vertical Sobel operators (Acc(Hsob),Acc(Vsob)).
9. Method according to claim 7 or 8, characterized in that said estimating local features (LF) for a pixel (Px) of the image block (IB) under examination provides for:
  - c1) considering an horizontal processing window (HPW) containing the pixel (Px) under examination and neighboring pixels (Pa,Pb,Pc,Pd) belonging to a same image line as the pixel (Px) and preceding and following the pixel (Px);
  - c2) applying said horizontal Sobel operator (Hsob) to each pixel (Pa-Pd,Px) of the horizontal processing window (HPW) to obtain a horizontal pattern of horizontal Sobel operator outputs (HS1-HS5);
  - c3) considering a vertical processing window (VPW) containing the pixel (Px) under examination and neighboring pixels (Pe,Pf,Pg,Ph) belonging to a same column of pixels as the pixel (Px) and preceding and following the pixel (Px);
  - c4) applying said vertical Sobel operator (Vsob) to each pixel (Pe-Ph,Px) of the vertical processing window (VPW) to obtain a vertical pattern of vertical Sobel operator outputs (VS1-VS5).
10. Method according to claim 9, characterized in that said horizontal and vertical processing windows (HPW,VPW) contains each one five pixels and are centered at said pixel (Px) under examination.
11. Method according to claim 10, characterized in that step d2) provides for determining degrees of membership of each horizontal Sobel operator output (HS1-HS5) of the horizontal pattern to a first fuzzy set "Small" and to a first fuzzy set "Big", evaluating activation degrees ( $\alpha_1$ - $\alpha_9$ ) of a first set of fuzzy rules each one associated with at least one predefined horizontal pattern of horizontal Sobel operator outputs, determining degrees of membership of each vertical Sobel operator output (VS1-VS5) of the vertical pattern to a second fuzzy set "Small" and to a second fuzzy set "Big" and evaluating activation degrees ( $\beta_1$ - $\beta_9$ ) of a second set of fuzzy rules each one associated with at least one predefined vertical pattern of vertical Sobel operator outputs.
12. Method according to claim 11, characterized in that said determining degrees of membership of the horizontal Sobel operator outputs (HS1-HS5) of the horizontal pattern to said first fuzzy sets "Small" and "Big" provides for determining a first and a second membership functions depending on said global features (GF), and said determining degrees of membership of the vertical Sobel operator outputs (VS1-VS5) of the vertical pattern to said second fuzzy sets "Small" and "Big" provides for determining a third and fourth membership functions depending on said global features (GF).
13. Method according to claim 12, characterized in that said groups of predefined weight factors (ci) comprise groups of predefined horizontal weight factors and groups of predefined vertical weight factors, each fuzzy rule of said first



set being associated with a respective one of said groups of predefined horizontal weight factors, and each fuzzy rule of said second set being associated with a respective one of said groups of predefined vertical weight factors.

14. Method according to claim 13, characterized in that said weight factors (H1-H5, V1-V5) comprise horizontal weight factors (H1-H5) and vertical weight factors (V1-V5), said horizontal weight factors (H1-H5) being determined by making a weighted average of the predefined horizontal weight factors with weight coefficients being formed by the activation degrees ( $\alpha_1$ - $\alpha_9$ ) of the fuzzy rules of the first set, and said vertical weight factors (V1-V5) being determined by making a weighted average of the predefined vertical weight factors with weight coefficients formed by the activation degrees ( $\beta_1$ - $\beta_9$ ) of the fuzzy rules of the second set.
15. Method according to claim 14, characterized in that the value of the pixel (Px) under examination is modified by applying the horizontal weight factors (H1-H5) to the values of the pixels (Pa-Pd, Px) in the horizontal processing window (HPW) and applying the vertical weight factors (V1-V5) to the values of the pixels (Pe-Ph, Px) in the vertical processing window (VPW).
16. Post-processing device for reducing artifacts in block-coded digital images, characterized by comprising:
  - first means (1) supplied with an input image (In) for estimating global features (MOUT) of an image block (IB) under examination, said global features providing information on an average content of image edges along the horizontal and vertical directions of said image block (IB);
  - second means (7,8,11,12,D) supplied with said input image (In) for estimating local features (VS1-VS5, HS1-HS5) for each pixel (Px) of the image block (IB) under examination, said local features providing information on the content of image edges along the horizontal and vertical directions of an image area around said pixel (Px);
  - third means (9,D,10) supplied with said global features (MOUT) and said local features (VS1-VS5, HS1-HS5) for modifying the value of said pixel (Px) according to both said global features (MOUT) and said local features (VS1-VS5, HS1-HS5).
17. Device according to claim 16, characterized in that said first means (1) comprises means (3,4) for evaluating horizontal and vertical Sobel operator outputs (Hsob, Vsob) of horizontal and vertical Sobel operators applied to pixels of an image sub-block (ISB) internal to said image block (IB) under examination, and accumulator means (5) for accumulating the horizontal Sobel operator outputs (Hsob) and the vertical Sobel operator outputs (Vsob) for each pixel of the image sub-block (ISB).
18. Device according to claim 17, characterized in that said second means (7,8,11,12,D) comprises fourth means (7,8) for evaluating vertical Sobel operator outputs (VS1-VS5) of vertical Sobel operators (Vsob) applied to said pixel (Px) and to vertically-neighboring pixels (Pe, Pf, Pg, Ph) preceding and following the pixel (Px) in the vertical direction, and fifth means (11,12,D) for evaluating horizontal Sobel operator outputs (HS1-HS5) of horizontal Sobel operators (Hsob) applied to said pixel (Px) and to horizontally-neighboring pixels (Pa, Pb, Pc, Pd) preceding and following the pixel (Px) in the horizontal direction.
19. Device according to claim 18, characterized in that said third means (9,D,10) comprises vertical filter means (9,D) supplied with said vertical Sobel operator outputs (VS1-VS5) and said global features (MOUT) for calculating a vertically-filtered value (Px) of said pixel (Px) depending on said global features (MOUT), said vertical Sobel operator outputs (VS1-VS5) and the values of said vertically-neighboring pixels (Pe, Pf, Pg, Ph), and horizontal filter means (10) supplied with said global features (MOUT), said horizontal Sobel operator outputs (HS1-HS5) and said vertically-filtered value (Px) of said pixel (Px) for calculating a horizontally-filtered value of said pixel (Px) depending on said global features (MOUT), said horizontal Sobel operator outputs (HS1-HS5) and the vertically-filtered values (Pa, Pb, Pc, Pd) of said pixel (Px) and said horizontally-neighboring pixels (Pa, Pb, Pc, Pd).
20. Device according to claim 19, characterized in that said vertical filter means (9,D) comprises first fuzzy computation means (13) supplied with said vertical Sobel operator outputs (VS1-VS5) and said global features (MOUT) for evaluating degrees of coincidence ( $\beta_1$ - $\beta_9$ ) of the pattern of vertical Sobel operator outputs (VS1-VS5) with a set of predefined patterns of vertical Sobel operator outputs, said degrees of coincidence ( $\beta_1$ - $\beta_9$ ) depending on said global features (MOUT), a look-up table of predefined vertical filter coefficients (F1-F9) each one associated to at least one respective predefined pattern of vertical Sobel operator outputs, a vertical filter coefficients composition means (14) supplied with said predefined vertical filter coefficients for generating a set of vertical filter coefficients (V1-V5) which are a weighted average of the predefined vertical filter coefficients with weight coefficients formed by said degrees of coincidence ( $\beta_1$ - $\beta_9$ ), and a vertical filter (15) supplied with said vertical filter coefficients (V1-V5) and

the values of the pixel (Px) and the vertically-neighboring pixels (Pe,Pt,Pg,Ph) for providing at an output (FOUT) said vertically-filtered value of the pixel (Px).

21. Device according to claim 20, characterized in that said horizontal filter means (10) comprises second fuzzy computation means (13) supplied with said horizontal Sobel operator outputs (HS1-HS5) and said global features (MOUT) for evaluating degrees of coincidence ( $\alpha 1$ - $\alpha 9$ ) of the pattern of horizontal Sobel operator outputs (HS1-HS5) with a set of predefined patterns of horizontal Sobel operator outputs, said degrees of coincidence ( $\alpha 1$ - $\alpha 9$ ) depending on said global features (MOUT), a look-up table of predefined horizontal filter coefficients (F1-F9) each one associated to at least one respective predefined pattern of horizontal Sobel operator outputs, a horizontal filter coefficients composition means (14) supplied with said predefined horizontal filter coefficients (F1-F9) for generating a set of horizontal filter coefficients (H1-H5) which are a weighted average of the predefined horizontal filter coefficients with weight coefficients formed by said degrees of coincidence ( $\alpha 1$ - $\alpha 9$ ), and a horizontal filter (15) supplied with said horizontal filter coefficients (H1-H5) and the vertically-filtered values (Pa,Pb,Px,Pc,Pd) of the pixel (Px) and the horizontally-neighboring pixels (Pa,Pb,Pc,Pd) for providing at an output (FOUT) said horizontally-filtered value (Out) of the pixel (Px).

Fig.1

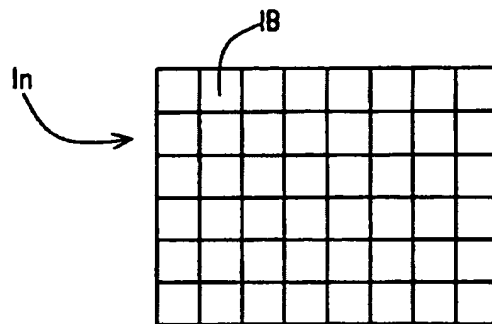
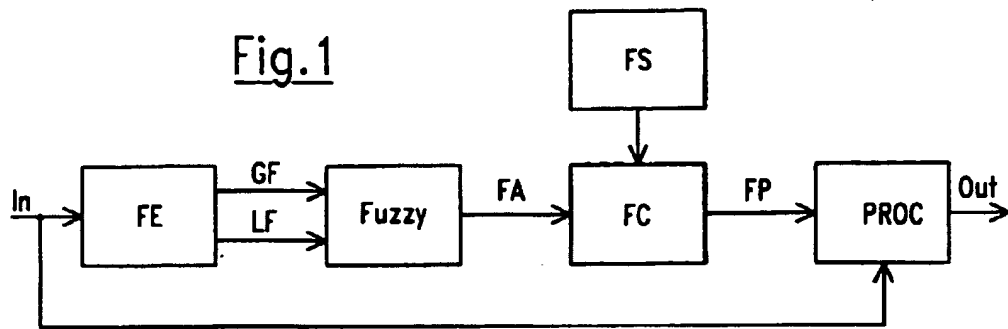


Fig.2

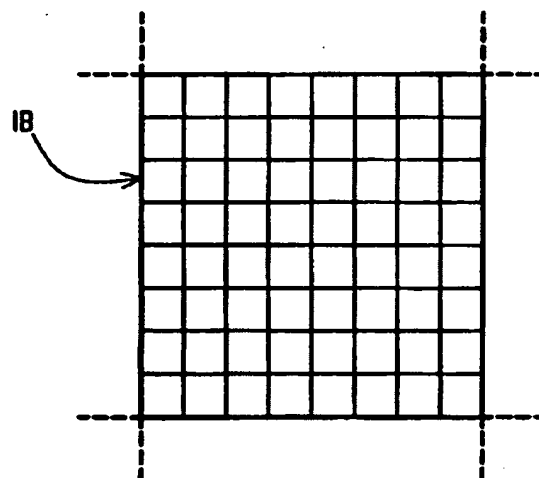


Fig.3

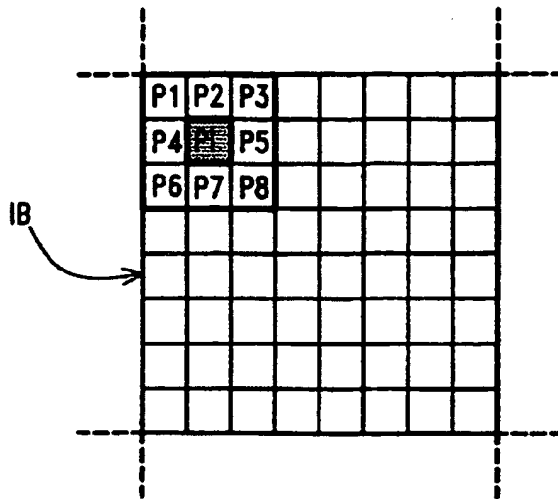


Fig.4

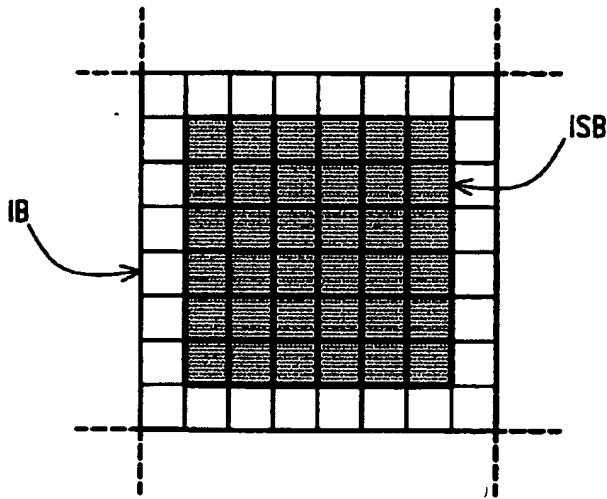


Fig.5

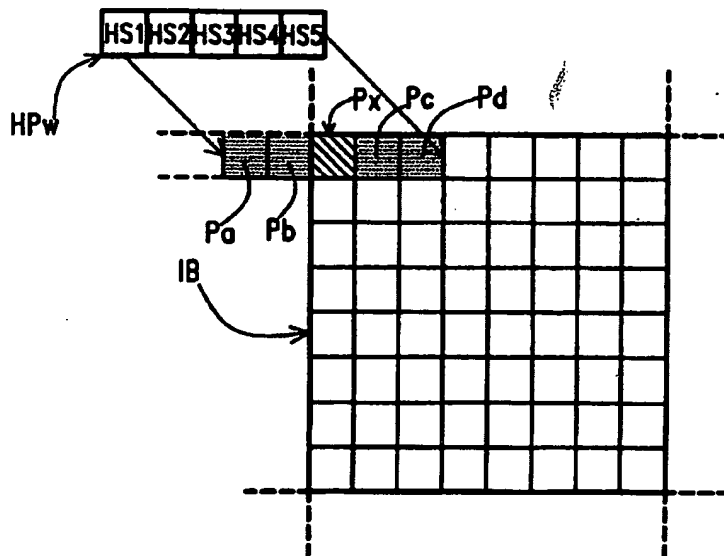
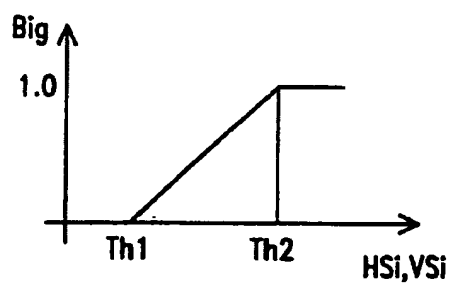
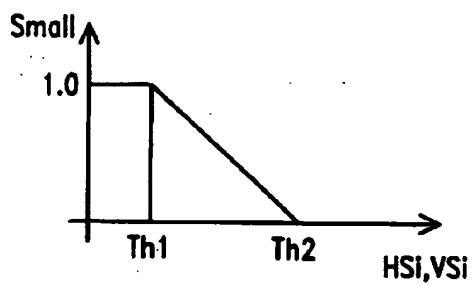
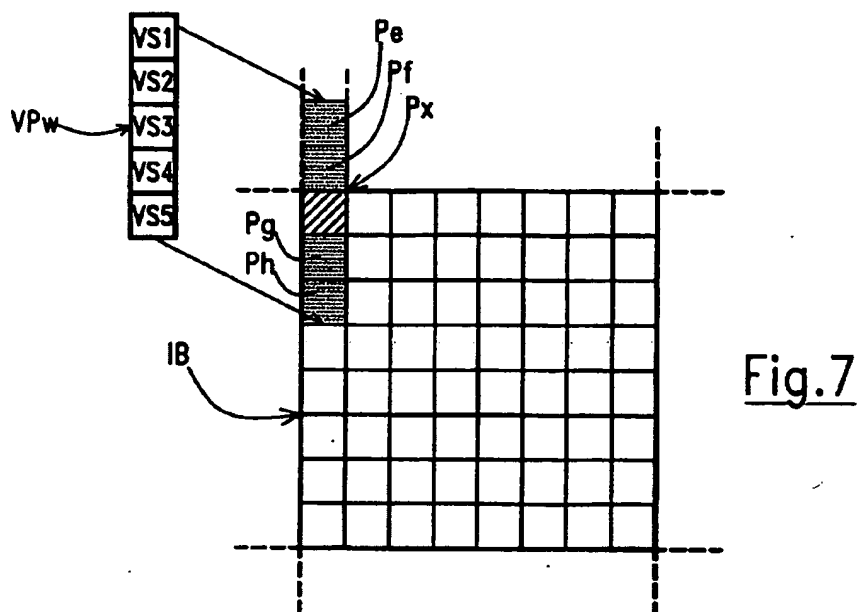


Fig.6



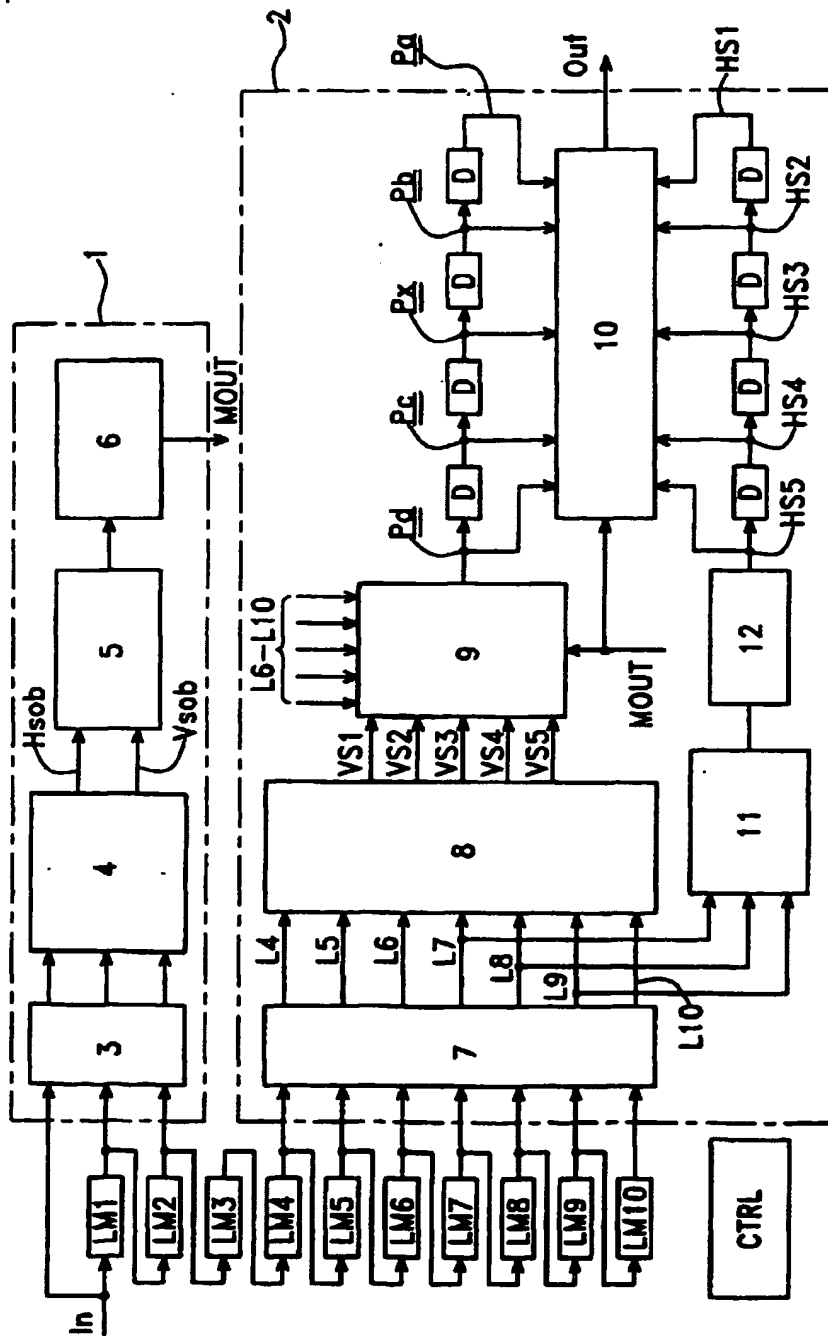


Fig.10

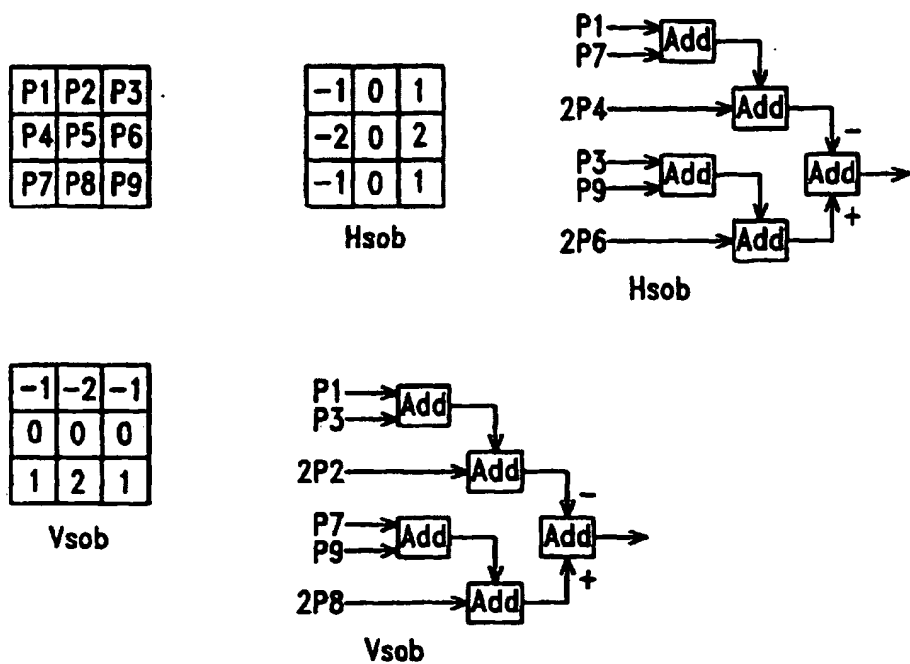


Fig.11

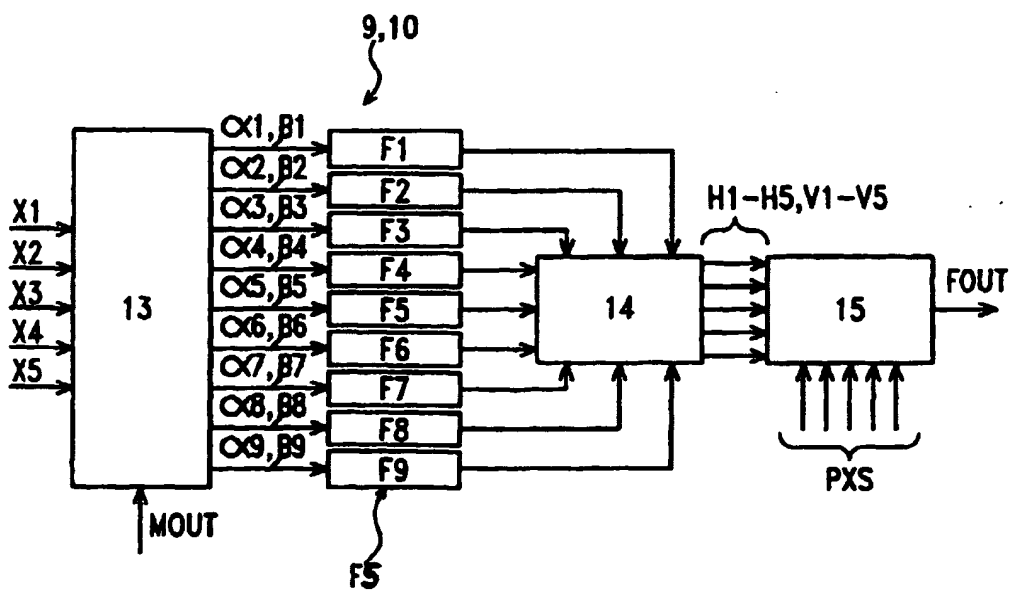


Fig.12



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 97 83 0264

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 8)
X	DERVIAUX C ET AL: "Blocking artifact reduction of DCT coded image sequences using a visually adaptive postprocessing" PROCEEDINGS OF THE 1996 IEEE INTERNATIONAL CONFERENCE ON IMAGE PROCESSING, ICIP'96, vol. 11, 16 - 19 September 1996, LAUSANNE, SWITZERLAND, pages 5-8, XP002044085 * page 5, left-hand column, line 1 - page 7, left-hand column, line 21 *	1-4,16	H04N7/30
A	---	5-10, 17-19	
X	HIROYUKI OKADA ET AL: "AN ADAPTIVE IMAGE QUALITY IMPROVEMENT METHOD FOR DCT CODING SCHEMES" PROCEEDINGS OF THE PICTURE CODING SYMPOSIUM (PCS), LAUSANNE, MAR. 17 - 19, 1993, no. -, 17 March 1993, SWISS FEDERAL INSTITUTE OF TECHNOLOGY, pages 13.20/A-13.20/B, XP000346472 * page 13.20A, line 14 - page 13.20B, line 23 *	1-4,16	
A	* figure 1 *	5-10, 17-19	TECHNICAL FIELDS SEARCHED (Int. Cl. 8) H04N
X	US 5 229 864 A (MORONAGA KENJI ET AL) 20 July 1993 * column 2, line 12 - column 2, line 32 * * column 3, line 27 - column 7, line 62 * * figures 1,8 *	1,2,16	
A	---	3-10, 17-19	
	---	-/--	
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>21 October 1997</b>	Examiner <b>Fassnacht, C</b>
<b>CATEGORY OF CITED DOCUMENTS</b> X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document		T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons S: member of the same patent family, corresponding document	





European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 97 83 0264

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	PATENT ABSTRACTS OF JAPAN vol. 018, no. 124 (E-1517), 28 February 1994 & JP 05 316316 A (OLYMPUS OPTICAL CO LTD), 26 November 1993, * abstract * * figure 2 *	1	
A	---	2-10, 16-19	
A	XIAOBING LEE ET AL: "INFORMATION LOSS RECOVERY FOR BLOCK-BASED IMAGE CODING TECHNIQUES - A FUZZY LOGIC APPROACH" IEEE TRANSACTIONS ON IMAGE PROCESSING, vol. 4, no. 3, 1 March 1995, pages 259-273, XP000501901 * page 259, left-hand column, line 1 - page 269, right-hand column, line 8 *	1-21	
A	---	1-21	
A	US 5 442 462 A (GUISSIN RAMI) 15 August 1995 * column 12, line 42 - column 12, line 53 *	1-21	TECHNICAL FIELDS SEARCHED (Int.Cl.6)
A	MANCUSO M ET AL: "Fuzzy logic based image processing in IQTV environment" IEEE TRANS. ON CONSUMER ELECTRONICS (USA), vol. 41, no. 3, August 1995, pages 917-925, XP002044086 * page 917, left-hand column, line 1 - page 918, right-hand column, line 11 * * figure 2 *	1-21	
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>21 October 1997</b>	Examiner <b>Fassnacht, C</b>
<b>CATEGORY OF CITED DOCUMENTS</b> X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

# A Generalized Block-Edge Impairment Metric for Video Coding

H. R. Wu and M. Yuen

**Abstract**—A new generalized block-edge impairment metric (GBIM) is presented in this paper as a quantitative distortion measure for blocking artifacts in digital video and image coding. This distortion measure does not require the original image sequence as a comparative reference, and is found to be consistent with subjective evaluation.

**Index Terms**—Blocking artifacts, quantitative impairment metric, video coding.

## I. INTRODUCTION

FOR bit rates ranging from 64 kbps (ITU H.261) to as high as 10–12 Mbps (MPEG-2) [1], we have shown in [2] that blocking effects, and its propagation through reconstructed video sequences, are the most significant of all coding artifacts. The blocking effect is also a source of a number of other types of reconstruction artifacts, such as stationary area granular noise [3]. It is well known that many forms of quantitative quality metrics, or distortion measures, used in image and video coding research, such as mean squared error (MSE), peak signal-to-noise ratio (PSNR), and mean absolute error (MAE) [1], are ineffective in quantifying the visibility of reconstruction artifacts, and, therefore, are ill suited for evaluating image and video compression techniques and products. The reason for this relates to the fact that these measures do not necessarily reflect our visual perception of the coding distortions and artifacts found in reconstructed sequences. Consequently, there is a poor correlation between these metrics and subjective assessment [4].

Recently, Karunasekera and Kingsbury introduced a new distortion measure for blocking (edge) artifacts in compressed images based on human visual sensitivity [4]. This quantitative distortion measure requires both the original and reconstructed images to form an error image, which is then used as an input into their visual model. This approach is similar to most of the other existing quantitative distortion measures [5], [6]. In the absence of the original image, the above distortion measures cannot be used to evaluate the quality of a reconstructed image or the presence of coding artifacts, such as the blocking effect.

Manuscript received September 12, 1996. This work was supported in part by a 1995 Australian Research Council grant. The associate editor coordinating the review of this manuscript and approving it for publication was Prof. Rashid Ansari.

The authors are with the Department of Digital Systems, Monash University, Clayton 3168 Australia (e-mail: hrw@rds.monash.edu.au).

Publisher Item Identifier S 1070-9908(97)08940-2.

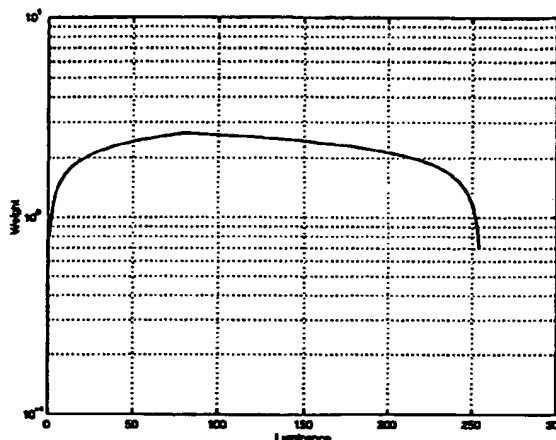


Fig. 1. The weighting function for the generalized BIM.

In [2], the block-edge impairment metric (BIM) was introduced to evaluate the visual significance of block-edge artifacts in a given image. The BIM was based on a formulation of constraint sets applied successfully in the postfiltering of reconstructed video images using projections onto convex sets (POCS) algorithms [7]. Whilst achieving results consistent with subjective evaluations, this metric was characterized by the fact that it did not require the original image to produce a measure of the distortion in a reconstructed image.

To take into account the luminance masking effects in extreme bright as well as extreme dark areas in a reconstructed image, a more general formulation of the BIM is presented in Section II of this contribution, parameters of which can be adjusted to correspond with the visibility of noise modeled in [8]. Section III will present experimental results using this generalized BIM as a distortion measure compared with PSNR.

## II. A GENERALIZED BLOCK-EDGE IMPAIRMENT METRIC

In [8], Girod suggested that distortions are most noticeable where the luminance value is between 70 and 90 (centered approximately on 81) in 8-b grey-scale images. To accommodate this observation, and to maintain the simplicity of the weighting function in the BIM, a generalized BIM (GBIM) is formulated as follows.

Given an image  $f = \{f_{c1} f_{c2} \dots f_{cN_c}\}$ , where  $f_{cj}$  is the  $j$ th column of the image array and  $N_c$  is the width of the image, we define the interpixel difference between each of the horizontal

P.O. BOX 1450

ALEXANDRIA, VA 22313-1450

IF UNDELIVERABLE RETURN IN TEN DAYS

OFFICIAL BUSINESS

AN EQUAL OPPORTUNITY EMPLOYER



02 1A 0004204479 MAY 16 2006  
MAILED FROM ZIP CODE 22314

RECEIVED  
JUN 12 2006  
USPTO MAIL CENTER

